



**ENTERPRISE TIME
RECORDING
SOLUTIONS INC.**

Enterprise Time Recording Solutions Analog Clocks

Your Time is Our Business


ANALOG WALL CLOCKS

Lathem Analog Wall Clocks feature high, quality glass lense, (shatterproof Lexan is optional) and heavy gauge steel casings. Fine brass movements provide silent, trouble free operation. Hidden stem sets are mounted behind the case top to prevent tampering.


While the 12 inch round case is standard in surface, semi-flush, or double face mounts, other sizes and shapes are available to complement every decor. Optional cases available are: 10" round and square, and 15" round.



Surface Mount Clocks fasten either directly on a wall or base outlet (single or double gang wall box). Mounting brackets are supplied that secure the clock by a locking nut from the top.

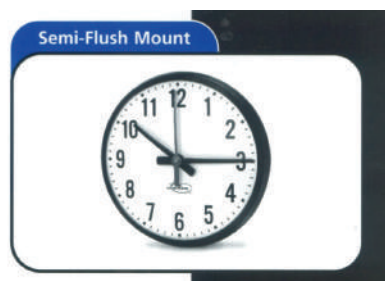

Semi-Flush Mount Clocks fasten directly on the wall and require a special box. The clock extends 7/8" from the wall. (Back Box optional).

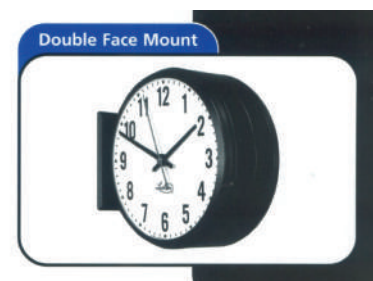

Double Face Mount Clocks can be hung from the ceiling or wall, and require a special box and adapter plate that is furnished with each clock.

Face Style Choices



12 Hour Round

12 Hour Square



24 Hour Round

24 Hour Square

Enterprise Time Recording Solutions Analog Clocks

ANALOG WALL CLOCKS

Specifications

Shape	10", 12", 15" Round or 10", 12" Square
Face	Arabic (1-12 or 0-23)
Color	Charcoal Gray
Mounting Styles	Semi-Flush, Surface or Double (Ceiling or Wall)
Correction	Manual for Independent, Hourly and 12 Hourly for SS, or Hourly (12 Hourly optional) for ISC
Motor Input Voltage	115V AC for Independent, 115V AC (24V AC optional) for SS
Motor Input Frequency	60Hz (50Hz optional) for Independent and SS
Motor Input Power	4 Watts (8 Watts for Double Clock) for Independent and SS
Coil Input Voltage	115V AC (24V AC or 24V DC optional) for SS, 24V DC min., 36V DC max. for ISC
Coil Input Frequency	60Hz (50Hz or V DC optional) for SS
Coil Input Power	5.4 Watts for 115V AC SS Type; 3.5 Watts for 24V AC & 24V DC SS Type; 0.7 Watts for 24V DC ISC Type
Connector	Cord set for independent, polarized quick disconnect connector plug with socket pins. Mating female connector is provided with approximately 18 inches of wiring for SS and IS.

Type Clock Dial	10" Square Flush	12" Square Flush	12" Round Flush	15" Round Flush	10" Square Surface	12" Square Surface	10" Round Surface	10" Round Surface	12" Round Surface	15" Round Surface
Dial Dimensions	10.12" x 10.12"	12.12" x 12.12"	12.12" x diameter	15.75" x diameter	10.12" x 10.12"	12.12" x 12.12"	10.12" x diameter	10.12" x diameter	12.12" x diameter	15.75" x diameter
Outside Dimensions	11.12" x 11.12"	13.12" x 13.12"	13.12" x diameter	16.75" x diameter	11.25" x 11.25"	13.12" x 13.12"	11.12" x diameter	12.5" x diameter	14.5" x diameter	18.25" x diameter
Overall Proj. from Wall	1.75"	1.75"	1.62"	1.75"	3.87"	4"	1.75"	3.75"	3.87"	4"
Center of Clock Below Center of Outlet Box	App. Same	App. Same	App. Same	App. Same	3.75	4.12	App. Same	3.5	4.62	6.5
Synch. Ship. Wt. (lbs.)	11.8	13.6	11.9	14.3	9.5	11.6	6.0	8.5	9.5	11.6
Impulse Ship. Wt. (lbs.)	10.1	12.0	10.2	12.6	7.9	10.0	6.0	7.8	7.5	10.4



Enterprise Time Recording Solutions Inc.

Head Office: 237 Romina Drive, Suite 201 & 202 Vaughan, ON L4K 4V3

Phone: (905) 660-6167, Toll Free: 1-877-660-TIME(8463), Fax: (905) 660-4810

Website: www.enterprisetime.ca | Authorized Lathem Time Dealer